6P6C RJ-11 Voice Designer Wall Plate

PRODUCT SPECIFICATION

Package includes:

A. 6P6C Voice Designer Wall Plate, 1 pc
B. #6-32 x 3/4" Oval Head, Countersink Machine Screw, 2 pcs

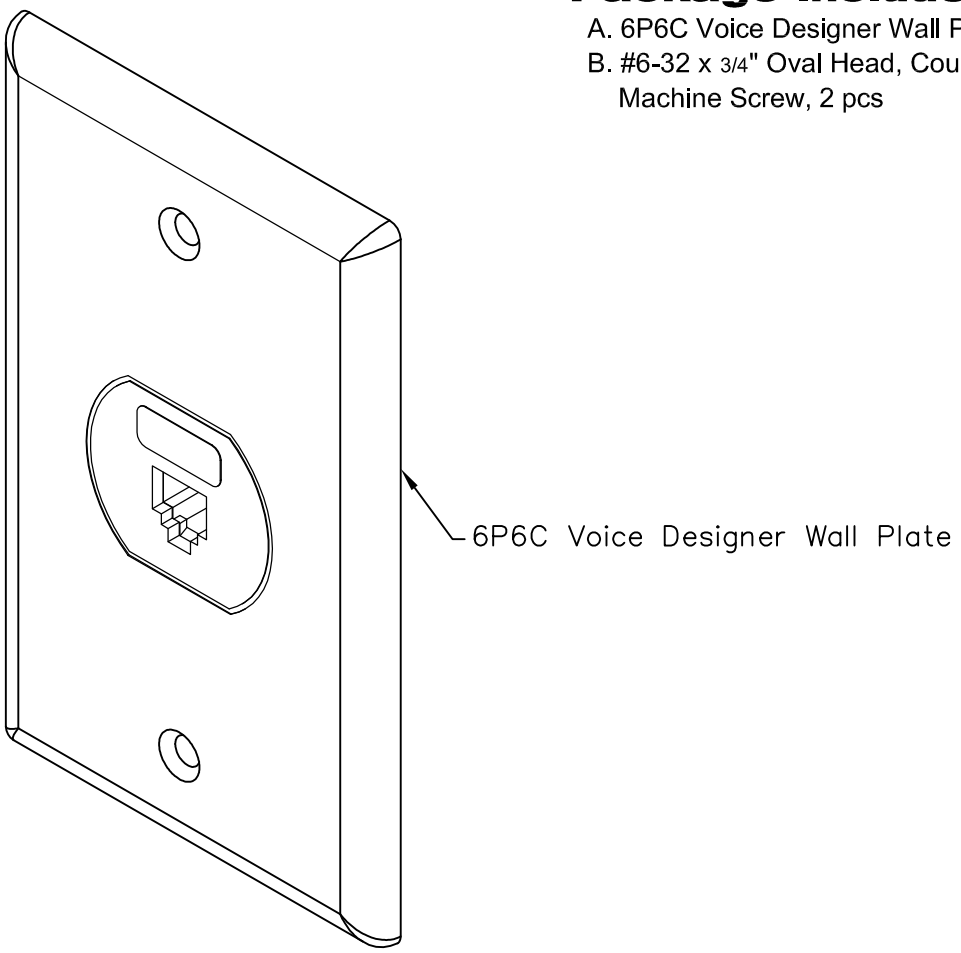

Features and Benefits:

- Configured to fit standard single gang outlet box
- Designed for all voice connectivity to the work area for commercial or residential applications
- Provides with traditional screw down terminals for voice connectivity on the rear
- Rugged and durable construction
- Used with ICLC4 and ICLC6 line cords
- Available in ivory
- ANSI/TIA-568-C and UL 1863 compliant

WALL PLATE, DESIGNER, VOICE 6P6C			
ITEM NO.	IC630S60XX	REV. A	
DWG NO.	PS630S6000	PAGE NO. 1	

Premium**Products** Proven**Performance** Competitive**Prices**

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

© 2015 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.

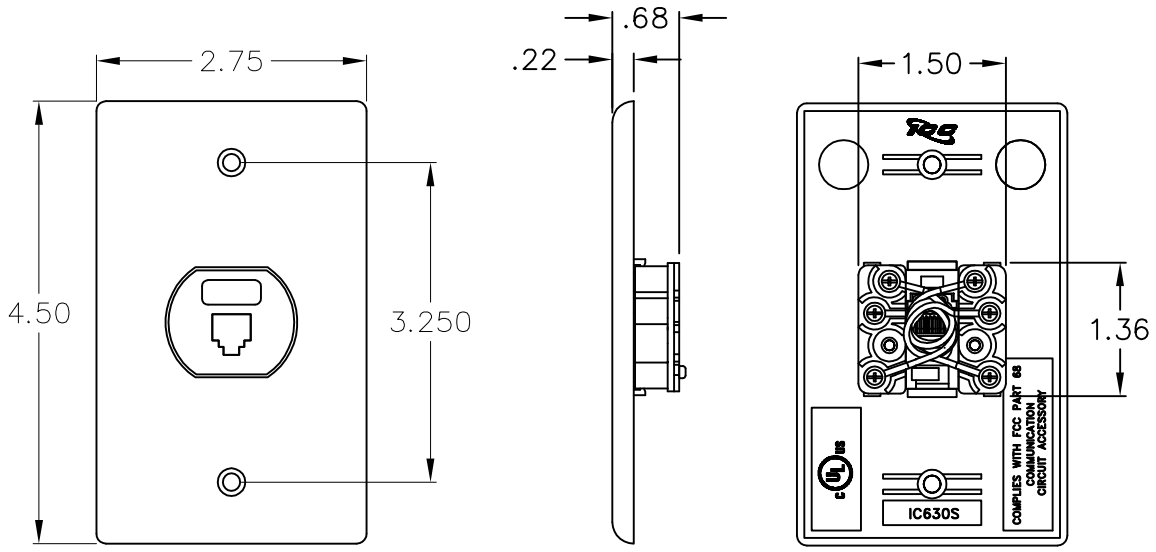

NOTE: UNLESS OTHERWISE SPECIFIED

1. FACEPLATE:
   A. MATERIAL: ABS, UL 94V-0
   B. COLOR: XX: IV-IVORY
2. WIRING BLOCK:
   A. MATERIAL & FINISH:
      -HOUSING: ABS, UL 94V-0
      -SPRING WIRE CONTACTS: PHOSPHOR BRONZE GOLD PLATING OVER 100 MICRO INCH NICKEL
      -GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
      -WIRE LEADS: 26 AWG STRANDED WIRE
      -TERMINATION SCREWS: #6-20 X .415 FLAT PAN HEAD TAPPING SCREWS WITH TWO WASHERS 15 LBS/INCH MIN TORQUE ZINC CHROMATIC PLATED STEEL
      -TERMINATION LUGS: BRASS
   B. ELECTRICAL:
      -CURRENT RATING: 1.5 AMP MAX
      -DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VOLTS RMS, 60 Hz
      -CONTACT RESISTANCE: < 20 MILLIOHMS
      -INSULATION RESISTANCE: > 10 MEGAOHMS
      -PERFORMANCE: RETURN LOSS OF -20 dB MAX FREQUENCY RANGE DC -1.5 GHz
   C. MECHANICAL:
      -TOTAL MATING FORCE: 500 GRAMS FOR 6 WIRES LEAD
      -RETENTION: 17 LBS BETWEEN JACK AND PLUG
      -CRIMP TENSILE STRENGTH: 4.0-500 LBS

REAR VIEW

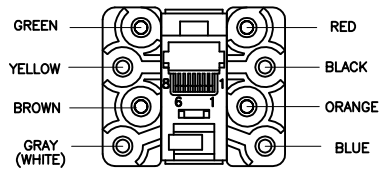

WIRING DIAGRAM

JACK POSITION	WIRE COLOR 6 COND.
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

c UL us FILE NO. 125268

WALL PLATE, DESIGNER, VOICE 6P6C		
ITEM NO.	IC630S60XX	REV. A
DWG NO.	PS630S6000	PAGE NO. 2

ICC Premium Products Proven Performance Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

© 2015 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.